

Press Message

Page 1 of 4 13.11.2017

Pilz GmbH & Co. KG Felix-Wankel-Straße 2 73760 Ostfildern Germany http://www.pilz.com

Configurable, safe small controllers PNOZmulti 2 with new Motion Monitoring functions - SLA-M and SAR-M for drives

Ostfildern, 13.11.2017 - For the Motion Monitoring modules
PNOZ m EF 1MM and 2MM of the configurable small controller
PNOZmulti 2, two new safety functions are now available for
drive monitoring: For safely limited acceleration SLA-M and the
safe acceleration range SAR-M. The new motion monitoring
functions are available from software version 10.6 of
PNOZmulti Configurator. They ensure additional safety and
productivity at plants and machines.

Acceleration without risk

The Motion Monitoring expansion modules offer safety functions in accordance with EN 61800-5-2 for safe motion monitoring. The SLA-M function safely monitors the maximum acceleration of the drive, if necessary preventing the motor from exceeding the defined acceleration limit. The SAR-M function ensures that the safely monitored acceleration remains within defined limit values. As a result, axis applications such as handling axes or spindle axes, can be safely monitored in all industries – including wind power.





Software that moves

Configuration of all safety functions is performed in PNOZmulti 2 using the software tool PNOZmulti Configurator. Using the software tool makes it easy to define limit values and ranges. For the motion monitoring modules, a separate module program mIQ is configured that is then run locally on the module. Fine-granular configuration of several monitoring areas is possible. And with 256 additional connection lines, a larger application program is feasible. Also, the module program ensures the safe delayed shutdown also in case of an error of the base module. This way, the module program guarantees that the reaction time is significantly lowered.

Diverse functionality for safety

The safely limited acceleration and the safe acceleration range complement the already existing safety functions Safe Stop 1 (SS1), Safe Stop 2 (SS2), Safe Speed Range" (SSR), Safe Speed Monitoring (SSM), and Safe Direction (SDI) and Safe Operating Stop (SOS). These functions are available from hardware version 2.2. and they guarantee a high availability of the drive application.


Various head modules for various tasks

The Motion Monitoring module PNOZ m EF 1MM can monitor one axis, the PNOZ m EF 2MM monitors two axes. The modules signal the status of the monitored values to the base units. The values can be transferred to a higher-level controller via a fieldbus module. The expansion modules satisfy requirements of the EN IEC 61508 to SIL and the EN ISO 13849-1 to PL e. As a result, hazardous movements can be monitored easily and safely.

More information about the product is available at the *E-shop*.

At the SPS IPC Drives you can find Pilz in Hall 9, Stand 370. For further information please click here.



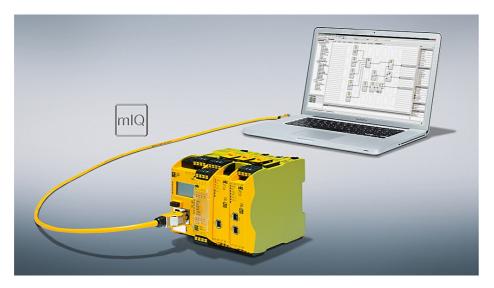

Caption: For the Motion Monitoring modules PNOZ m EF 1MM and 2MM of the configurable small controller PNOZmulti 2 two new functions are available for drive monitoring.

You can find texts and images at www.pilz.com also for downloading. To go directly to the relevant internet pages in the press centre, enter the following Web code in the search of the home page:: 192569





Pilz in social networks

In our social media channels we give you background information concerning the company and the people at Pilz, and we report on current developments in Automation Technology.



https://www.facebook.com/pilzAT



https://twitter.com/Pilz AT



https://www.youtube.com/channel/UCj0HAVETvzNiN3g90RPtJtw



https://www.xing.com/companies/pilzges.m.b.h.sichereautomation



https://www.linkedin.com/company/pilz-ges-mb-h/

Contact for journalists

Stephan Marban Pressekontakt +43 1 7986263-0 pilz@pilz.at

Marianne Ecker Marketing +43 1 7986263-56

m.ecker@pilz.at